


1、Files included



2、Install the upgrade tool “Media product tool” and open

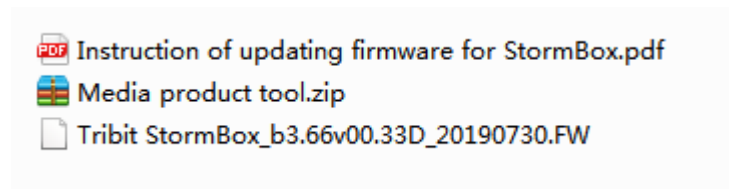

3、 Keep the speaker “power off” and follow the step as below

Step 1: Hold the “Bluetooth button” and then plugin the micro usb cable and connect to PC



Step 2: The speaker has detected successful and ready for upgrade, then release “Bluetooth button”







Step 3: click this button to load the "firmware" file

Step 4: find the folder of the firmware and double click "Tribit StormBox_b3.66v00.3 3D_20190730.FW" file

Step 5: click here to finish "firmware" adding

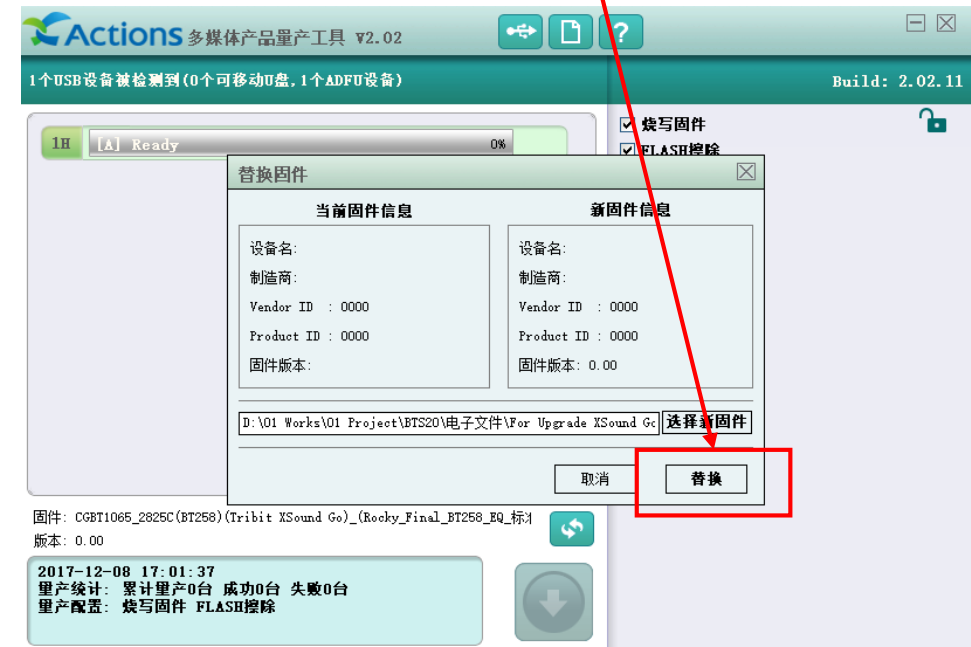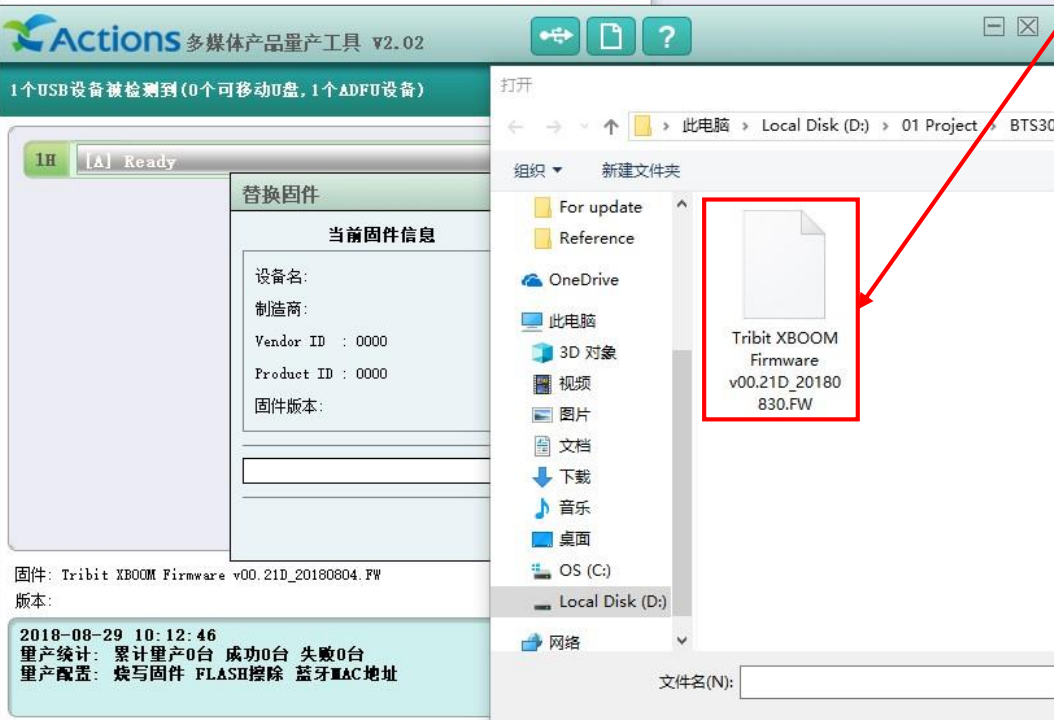

Step 6: click this button to begin the "firmware" upgrading

Step 7: upgrade successful

The screenshot displays the 'Actions' multimedia product mass production tool v2.02 interface. The window title bar includes the logo, name, version, and standard window controls. The status bar at the top indicates '1个USB设备被检测到(0个可移动U盘, 1个ADFU设备)' and 'Build: 2.02.11'. The main interface is divided into several sections:

- Progress Bar:** Shows the progress of the upgrade. In Step 6, it is at 0% and labeled '[A] Ready'. In Step 7, it is at 100% and labeled '[A] Successful'.
- Configuration Panel:** Contains checkboxes for '烧写固件' (checked), 'FLASH擦除' (checked), '自动化量产' (unchecked), and '蓝牙MAC地址' (checked). Below these are input fields for '厂商标识号' (6), '量产PC编号' (6), and '起始地址号' (111).
- File Information:** Shows the firmware file '固件: Tribit XBOOM Firmware v00.21D_20180830.FW' and version '版本: 0.00'.
- Production Statistics:** Displays the date '2018-08-29 10:12:46' and statistics: '量产统计: 累计量产0台 成功0台 失败0台' (Step 6) vs '累计量产1台 成功1台 失败0台' (Step 7). The configuration is listed as '烧写固件 FLASH擦除 蓝牙MAC地址'.
- Buttons:** A large green button with a white downward arrow is highlighted in a red box in both screenshots, indicating the start of the upgrade process.